

Chamfering machine Manufacturer Since 2008

SteviS Tech. Co., Ltd.

Add.: No.115, Zhangcha 1st road, Zhangcha,
Chancheng, Foshan,
Guangdong, China. Zip 528000
Mob.: +86-17324522537
+86-17324520257
EMail: info@stevistech.com
Website: <https://www.stevistech.com>



SteviS Tech. Co., Ltd.



Model No.	ST-50CFA-HDJ	ST-80CFA-HDJ	ST-100CFA-HDJ
Motor Power	2.2kW (2 sets)	2.2kW (2 sets)	2.2kW (2 sets)
Air pressure	MPA10KG	MPA10KG	MPA10KG
Outer diameter	Φ8-Φ50mm	Φ8-Φ80mm	Φ10-Φ100mm
Working length	Standard 20-180mm	Standard 20-180mm	Standard 20-180mm
Accuarcy	±0.05mm	±0.05mm	±0.05mm
Verticality	±0.05mm	±0.05mm	±0.05mm
Working speed	3-5 s/piece	3-5 s/piece	3-5 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar		
L*W*H	2000*1300*1500mm	2100*1400*1600mm	2200*1500*1600mm



Model No.	ST-50CFA-HDJ	ST-80CFA-HDJ	ST-100CFA-HDJ
Air pressure	MPA6-8KG	MPA6-8KG	MPA6-8KG
Outer diameter	Φ8-Φ50mm	Φ8-Φ80mm	Φ10-Φ100mm
Working length	Standard 120-500mm (Can be customized)	Standard 120-500mm (Can be customized)	Standard 120-500mm (Can be customized)
Accuarcy	±0.05mm	±0.05mm	±0.05mm
Verticality	±0.05mm	±0.05mm	±0.05mm
Working speed	3-5 s/piece	3-5 s/piece	3-5 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar		
L*W*H	2200*1300*1500mm	2200*1400*1550mm	2200*1400*1550mm



Model No.	ST-60CFA-HDJ	ST-80CFA-HDJ
Motor Power	2.2kW (2 sets)	2.2kW (2 sets)
Air pressure	MPA6-8KG	MPA6-8KG
Outer diameter	Φ8-Φ60mm	Φ10-Φ85mm
Working length	Standard 20-180mm	Standard 20-180mm
Accuarcy	±0.05mm	±0.05mm
Verticality	±0.05mm	±0.05mm
Working speed	3-5 s/piece	3-5 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar	
L*W*H	2000*1300*1500mm	2100*1400*1550mm



Model No.	ST-50CFA-PDJ	ST-80CFA-PDJ	ST-100CFA-PDJ
Air pressure	MPA6-8KG	MPA6-8KG	MPA6-8KG
Outer diameter	Φ8-Φ50mm	Φ8-Φ80mm	Φ10-Φ100mm
Working length	Standard 120-500mm (Can be customized)	Standard 120-500mm (Can be customized)	Standard 120-500mm (Can be customized)
Accuarcy	±0.05mm	±0.05mm	±0.05mm
Verticality	±0.05mm	±0.05mm	±0.05mm
Working speed	3-5 s/piece	3-5 s/piece	3-5 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar		
L*W*H	2200*1300*1500mm	2200*1400*1550mm	2200*1400*1550mm



ST-50CFA-H

Motor Power	1.5kW (2 sets)
Air pressure	MPA10KG
Outer diameter	Round bar Φ 6-20mm Round pipe Φ 10- Φ 50mm
Working length	Standard 20-180mm
Accuarcy	$\pm$ 0.05mm
Working speed	3-5 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar
L*W*H	1400*1200*1500mm




Model No.	ST-50CFA-H	ST-80CFA-H	ST-100CFA-H
Motor Power	2.2kW (2 sets)	2.2kW (2 sets)	2.2kW (2 sets)
Air pressure	MPA10KG	MPA10KG	MPA10KG
Outer diameter	Φ 8- Φ 50mm	Φ 8- Φ 80mm	Φ 10- Φ 100mm
Working length	Standard 20-180mm	Standard 20-180mm	Standard 20-180mm
Accuarcy	$\pm$ 0.05mm	$\pm$ 0.05mm	$\pm$ 0.05mm
Working speed	3-5 s/piece	3-5 s/piece	3-5 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar		
L*W*H	1400*1200*1500mm	1400*1250*1550mm	1450*1300*1600mm



Model No.	ST-50CSM-P	ST-80CSM-P	ST-100CSM-P	ST-125CSM-P	ST-150CSM-P
Air pressure	MPA6-8KG	MPA6-8KG	MPA6-8KG	MPA6-8KG	MPA6-8KG
Outer diameter	Φ 8- Φ 50mm	Φ 8- Φ 80mm	Φ 10- Φ 100mm	Φ 19- Φ 125mm	Φ 25- Φ 150mm
Working length	Standard 100-600mm, shorter length version 40-600mm (Can be customized working length)				
Accuarcy	$\pm$ 0.1mm	$\pm$ 0.1mm	$\pm$ 0.1mm	$\pm$ 0.1mm	$\pm$ 0.1mm
Working speed	3-5 s/piece	3-5 s/piece	3-5 s/piece	3-5 s/piece	3-5 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar				
L*W*H	1800*1000*1100mm	1800*1100*1150mm	2000*1200*1250mm	2000*1300*1300mm	2200*1500*1500mm



Model No.	ST-50CSM-H	ST-80CSM-H	ST-100CSM-H	ST-125CSM-H	ST-150CSM-H
Air pressure	MPA6-8KG	MPA6-8KG	MPA6-8KG	MPA6-8KG	MPA6-8KG
Outer diameter	Φ 8- Φ 50mm	Φ 8- Φ 80mm	Φ 10- Φ 100mm	Φ 19- Φ 125mm	Φ 25- Φ 150mm
Working length	Standard 100-600mm, shorter length version 40-600mm (Can be customized working length)				
Accuarcy	$\pm$ 0.1mm	$\pm$ 0.1mm	$\pm$ 0.1mm	$\pm$ 0.1mm	$\pm$ 0.1mm
Working speed	3-5 s/piece	3-5 s/piece	3-5 s/piece	3-5 s/piece	3-5 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar				
L*W*H	1800*1000*1100mm	1800*1100*1150mm	2000*1200*1250mm	2000*1300*1300mm	2200*1500*1500mm

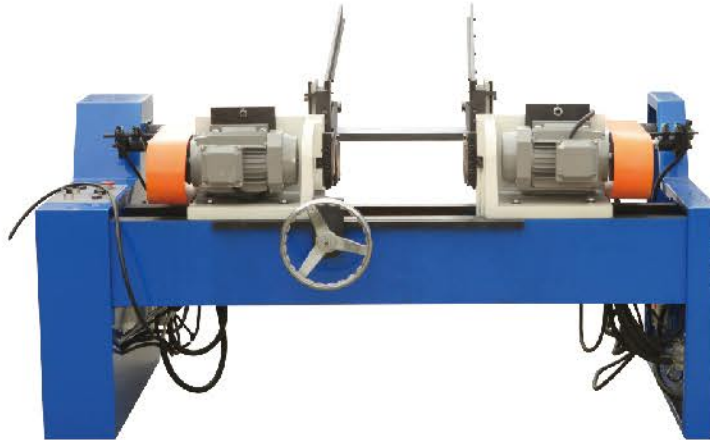

Model No.	ST-50CSM-EP	ST-80CSM-EP	ST-100CSM-EP	ST-125CSM-EP	ST-150CSM-EP
Air pressure	MPA6-8KG	MPA6-8KG	MPA6-8KG	MPA6-8KG	MPA6-8KG
Outer diameter	Φ8-Φ50mm	Φ8-Φ80mm	Φ10-Φ100mm	Φ19-Φ125mm	Φ25-Φ150mm
Working length	Standard 100-600mm, shorter length version 40-600mm (Can be customized working length)				
Accuracy	±0.1mm	±0.1mm	±0.1mm	±0.1mm	±0.1mm
Working speed	3-5 s/piece	3-5 s/piece	3-5 s/piece	3-5 s/piece	3-5 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar				
L*W*H	1800*1000*1100mm	1800*1100*1150mm	2000*1200*1250mm	2000*1300*1300mm	2200*1500*1500mm



Model No.	ST-50CSM-EH	ST-80CSM-EH	ST-100CSM-EH	ST-125CSM-EH	ST-150CSM-EH
Air pressure	MPA6-8KG	MPA6-8KG	MPA6-8KG	MPA6-8KG	MPA6-8KG
Outer diameter	Φ8-Φ50mm	Φ8-Φ80mm	Φ10-Φ100mm	Φ19-Φ125mm	Φ25-Φ150mm
Working length	Standard 100-600mm, shorter length version 40-600mm (Can be customized working length)				
Accuracy	±0.1mm	±0.1mm	±0.1mm	±0.1mm	±0.1mm
Working speed	3-5 s/piece	3-5 s/piece	3-5 s/piece	3-5 s/piece	3-5 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar				
L*W*H	1800*1000*1100mm	1800*1100*1150mm	2000*1200*1250mm	2000*1300*1300mm	2200*1500*1500mm



Model No.	ST-160CFA-H	Model No.	ST-125CFA-H
Motor Power	3kW (2 sets)	Motor Power	3kW (2 sets)
Air pressure	MPA6-8KG	Air pressure	MPA6-8KG
Outer diameter	Round pipe Φ30-Φ160mm	Outer diameter	Round pipe Φ30-Φ125mm
Working length	100-500/300-1000/300-1500/300-20000mm	Working length	100-500mm
Accuracy	±0.1mm	Accuracy	±0.1mm
Working speed	4-8 s/piece	Working speed	4-8 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar	Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar
L*W*H	2400*1300*1500mm	L*W*H	2400*1300*1500mm



Model No.	ST-50CFA-PV	ST-80CFA-PV	ST-100CFA-PV	Model No.	ST-30CFA-P
Air pressure	MPA6-8KG	MPA6-8KG	MPA6-8KG	Air pressure	MPA6-8KG
Outer diameter	Φ6-Φ50mm	Φ6-Φ80mm	Φ10-Φ100mm	Outer diameter	Φ2-Φ30mm
Working length	Standard 100-600mm, shorter length version 40-600mm (Can be customized working length)			Working length	50-150mm
Accuracy	±0.1mm	±0.1mm	±0.1mm	Accuracy	±0.05mm
Working speed	3-5 s/piece	3-5 s/piece	3-5 s/piece	Working speed	3-5 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar			Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar
L*W*H	1800*1000*1100mm	1800*1100*1150mm	2000*1200*1250mm	L*W*H	1100*1000*1400mm

Model No.	ST-50CSM-HD	Model No.	ST-50CSM-EHD
Motor Power	380V*2.2kW*6HP*50Hz	Motor Power	380V*2.2kW*6HP*50Hz
Air pressure	MPA6-10KG	Air pressure	MPA6-10KG
Outer diameter	Round bar Φ6-30mm Round pipe Φ10-Φ50mm	Outer diameter	Round bar Φ6-30mm Round pipe Φ10-Φ50mm
Working length	100-200mm (2 pcs)/40-200mm(2 pcs)	Working length	100-200mm (2 pcs)/40-200mm(2 pcs)
Accuracy	±0.1mm	Accuracy	±0.1mm
Working speed	3-6 s/piece	Working speed	3-6 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar	Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar
L*W*H	2600*1000*1200mm	L*W*H	2200*1000*1200mm



ST-50CAC-P

Air pressure	MPA6-8KG
Outer diameter	Round bar $\Phi 3\text{-}\Phi 15\text{mm}$ Round pipe $\Phi 5\text{-}\Phi 50\text{mm}$
Working length	$\geq 30\text{mm}$
Accuarcy	$\pm 0.1\text{mm}$
Working speed	3-5 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar
L*W*H	800*600*1100mm



ST-80CAC-P

Motor Power	1.5kW
Air pressure	MPA6-8KG
Outer diameter	Round bar $\Phi 5\text{-}\Phi 20\text{mm}$ Round pipe $\Phi 8\text{-}\Phi 80\text{mm}$
Working length	$\geq 30\text{mm}$
Accuarcy	$\pm 0.1\text{mm}$
Working speed	3-5 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar
L*W*H	800*600*1100mm



Model No.	ST-60CAC-PE	ST-80CAC-PE
Motor Power	1.1kW	1.5kW
Air pressure	MPA6-8KG	MPA6-8KG
Outer diameter	Round bar $\Phi 2\text{-}\Phi 18\text{mm}$ Round pipe $\Phi 6\text{-}\Phi 60\text{mm}$	Round bar $\Phi 2\text{-}\Phi 20\text{mm}$ Round pipe $\Phi 6\text{-}\Phi 80\text{mm}$
Working length	$\geq 35\text{mm}$	$\geq 35\text{mm}$
Accuarcy	$\pm 0.1\text{mm}$	$\pm 0.1\text{mm}$
Working speed	3-5 s/piece	3-5 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar	
L*W*H	900*800*1300mm	1000*900*1400mm



Model No.	ST-60CAC-HE	ST-80CAC-HE
Motor Power	1.5kW	2.2kW
Air pressure	MPA6-8KG	MPA6-8KG
Outer diameter	Round bar $\Phi 2\text{-}\Phi 22\text{mm}$ Round pipe $\Phi 6\text{-}\Phi 60\text{mm}$	Round bar $\Phi 2\text{-}\Phi 25\text{mm}$ Round pipe $\Phi 6\text{-}\Phi 80\text{mm}$
Working length	$\geq 35\text{mm}$	$\geq 35\text{mm}$
Accuarcy	$\pm 0.1\text{mm}$	$\pm 0.1\text{mm}$
Working speed	3-5 s/piece	3-5 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar	
L*W*H	900*1200*1300mm	1000*1200*1400mm

ST-80CAC-H



Motor Power	2.2kW
Air pressure	MPA6-8KG
Outer diameter	Round bar $\Phi 2\text{-}\Phi 25\text{mm}$ Round pipe $\Phi 6\text{-}\Phi 80\text{mm}$
Working length	$\geq 35\text{mm}$
Accuarcy	$\pm 0.1\text{mm}$
Working speed	3-5 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar
L*W*H	1000*1200*1400mm



Model No.	ST-150CAC-P	ST-180CAC-P
Motor Power	2.2kW	3kW
Air pressure	MPA6-8KG	MPA6-8KG
Outer diameter	$\Phi 20\text{-}\Phi 150\text{mm}$	$\Phi 20\text{-}\Phi 180\text{mm}$
Working length	$\geq 50\text{mm}$	$\geq 50\text{mm}$
Accuarcy	$\pm 0.1\text{mm}$	$\pm 0.1\text{mm}$
Working speed	3-5 s/piece	3-5 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar	
L*W*H	1000*1400*1400mm	1000*1400*1400mm

ST-120CAC-H



Motor Power	3kW
Air pressure	MPA6-8KG
Outer diameter	Round bar $\Phi 5\text{-}\Phi 35\text{mm}$ Round pipe $\Phi 8\text{-}\Phi 120\text{mm}$
Working length	$\geq 35\text{mm}$
Accuarcy	$\pm 0.1\text{mm}$
Working speed	3-5 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar
L*W*H	1000*1400*1400mm



Model No.	ST-150CAC-H	ST-180CAC-H
Motor Power	3kW	4kW
Air pressure	MPA6-8KG	MPA6-8KG
Outer diameter	$\Phi 20\text{-}\Phi 150\text{mm}$	$\Phi 20\text{-}\Phi 180\text{mm}$
Working length	$\geq 40\text{mm}$	$\geq 40\text{mm}$
Accuarcy	$\pm 0.1\text{mm}$	$\pm 0.1\text{mm}$
Working speed	3-5 s/piece	3-5 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar	
L*W*H	1000*1400*1400mm	1000*1400*1400mm



ST-230CAC-H

Motor Power	5.5kW
Air pressure	MPA6-8KG
Outer diameter	Φ30-Φ230mm
Working length	≥40mm
Accuracy	±0.1mm
Working speed	3-5 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar
L*W*H	1200*1400*1600mm



Model No.	ST-150CAC-HEX
Air pressure	MPA6-8KG
Outer diameter	Diameter of bolt head Φ16-Φ56mm
Working length	80-500mm
Accuracy	±0.05mm
Working speed	4-10 s/piece
Applicable material	Hex Bolt Head
L*W*H	1400*1200*1600mm



ST-150CAC-HC

Motor Power	3kW
Air pressure	MPA6-8KG
Outer diameter	Round bar Φ5-Φ30mm Round pipe Φ10-Φ90mm
Working length	≥120mm
Accuracy	±0.1mm
Working speed	3-6 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar
L*W*H	1200*1100*1500mm



ST-300CAC-H

Motor Power	5.5kW
Air pressure	MPA6-8KG
Outer diameter	Round bar Φ5-Φ45mm Round pipe Φ50-Φ300mm
Working length	≥40mm
Accuracy	±0.1mm
Working speed	3-5 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar
L*W*H	1200*1500*1850mm



ST-150CAC-PC

Motor Power	2.2kW
Air pressure	MPA6-8KG
Outer diameter	Round bar Φ5-Φ25mm Round pipe Φ10-Φ90mm
Working length	≥120mm
Accuracy	±0.1mm
Working speed	3-5 s/piece
Applicable material	Stainless steel, carbon steel, iron, aluminum, brass, copper, nylon, plastic, solid round bar
L*W*H	1200*1100*1500mm